


- * To Extend The Life of Contact.
- * To Quench The Spark of Contact.
- * To Quench The Noise of Power Line.
- * To Quench The Surge of Voltage.

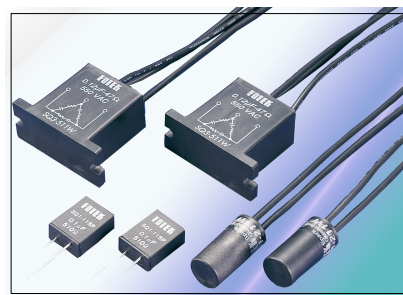

■ Specification

Type	Lead Wire Type			PCB Type
Model	SQ1-511W	SQ3-351W	SQ3-511W	SQ1-115P
Phase	Single phase	Three phase		Single phase
Operating Voltage max.	550VAC	300VAC	550VAC	250VAC
Value of Condenser	0.1 μ F	0.47 μ F	0.1 μ F	0.1 μ F
Value of Resister	100 Ω	100 Ω	100 Ω	510 Ω
Wattage of Resister	2W			
Frequency of Voltage	50 / 60 Hz			
Max. Durated Voltage	1500 Vp-p / 1ms	900 Vp-p / 1ms	1500 Vp-p / 1ms	500 Vp-p / 1ms
Isolation Strength	100M Ω / 500VDC			
Dielectric Strength	2.5KVAC / 1min.			
Operating Temp/Hum.	-25 $^{\circ}$ C ~ +70 $^{\circ}$ C ; -35 $^{\circ}$ C ~ +95 $^{\circ}$ C			
Material of Housing	Intensive PBT			
Length of wire	10cm			
Weight	Appr.13g	Appr.35g	Appr.35g	Appr.4.5g

■ Guiding of Order

Ex. SQ 3 - 5 5 1 W
 ① ② ③ ④ ⑤ ⑥

① Product

② Phase


③ Operating Voltage

④ Value of Condenser

⑤ Value of Resister

⑥ Mounting Method

Application

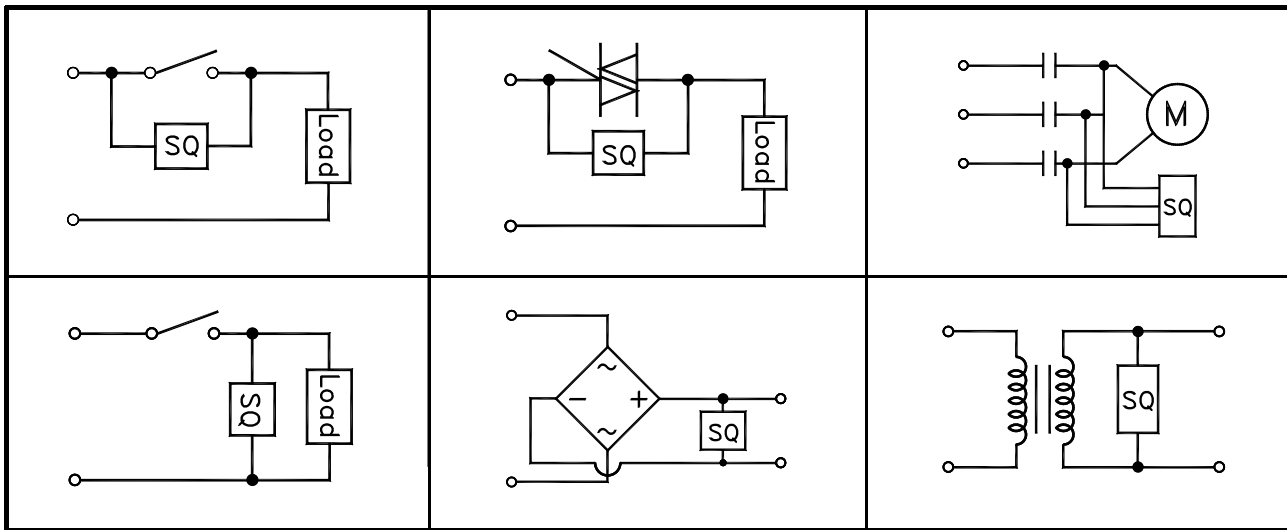

Dimension

